

IMPACT-RESISTANT NYLON CASTERS

- Swivel rig with double ball bearing in the swivel head
- High chemical resistance to many aggressive substances
- Minimal swivel head play and smooth rolling characteristics
- Medium heavy duty rigs, with top plate fitting
- Tread & Tire Hardness: 70° Shore D
- Low rolling and swivel resistance for smooth running performance
- Operating temperature: -15° F to +175° F
- Wheel Material: Nylon
- Frame Material: Steel

Tread Width: 1-1/4" (31.8 mm)

Bolt Hole Spacing: 1-3/4" x 2-13/16"

(44 mm x 71 mm) - 1-3/4" x 3-1/16" (44 mm 78 mm)

Bolt Size: 5/16" (7.93 mm)

Plate Size: 2-1/2" x 3-5/8" (64 mm x 92 mm)



Model No.	Wheel Diameter	Capacity	Caster Type	Bearing Type	Total Height	Price /Each
MO616	3-1/8" (79.5 mm)	265 lbs. (120 kg.)	Swivel	Plain Bore	4-3/8"	19.90
MO617	4" (102 mm)	265 lbs. (120 kg.)	Swivel	Plain Bore	5-3/8"	22.50
MO618	5" (127 mm)	265 lbs. (120 kg.)	Swivel	Plain Bore	6-5/16"	26.20
MO619	3-1/8" (79.5 mm)	265 lbs. (120 kg.)	Swivel w/Brake	Plain Bore	4-3/8"	25.90
MO620	4" (102 mm)	265 lbs. (120 kg.)	Swivel w/Brake	Plain Bore	5-3/8"	28.50
MO621	5" (127 mm)	265 lbs. (120 kg.)	Swivel w/Brake	Plain Bore	6-5/16"	32.30

THERMOPLASTIC ELASTOMER CASTERS

- Swivel rig with double ball bearing in the swivel head
- High operational comfort and low-noise operation
- Minimal swivel head play and smooth rolling characteristics
- Medium heavy duty rigs, with top plate fitting
- Low rolling and swivel resistance for smooth running performance
- Tread & Tire Hardness: 85° Shore A
- Operating temperature: -4° F to +140° F

Tread Width: 1-1/4" (31.8 mm)

Bolt Hole Spacing: 1-3/4" x 2-13/16"

(44 mm x 71 mm) - 1-3/4" x 3-1/16" (44 mm 78 mm)

Bolt Size: 5/16" (7.93 mm)

Plate Size: 2-1/2" x 3-5/8" (64 mm x 92 mm)



Model No.	Wheel Diameter	Capacity	Caster Type	Bearing Type	Total Height	Price /Each
MO604	3-1/8" (79.5 mm)	220 lbs. (100 kg.)	Swivel	Plain Bore	4-3/8"	21.40
MO605	3-1/8" (79.5 mm)	220 lbs. (100 kg.)	Swivel	Ball Bearing	4-3/8"	27.40
MO606	4" (102 mm)	240 lbs. (108 kg.)	Swivel	Plain Bore	5-3/8"	22.10
MO607	4" (102 mm)	240 lbs. (108 kg.)	Swivel	Ball Bearing	5-3/8"	25.90
MO608	5" (127 mm)	265 lbs. (120 kg.)	Swivel	Plain Bore	6-5/16"	25.80
MO609	5" (127 mm)	265 lbs. (120 kg.)	Swivel	Ball Bearing	6-5/16"	32.60
MO610	3-1/8" (79.5 mm)	220 lbs. (100 kg.)	Swivel w/Brake	Plain Bore	4-3/8"	27.60
MO611	3-1/8" (79.5 mm)	220 lbs. (100 kg.)	Swivel w/Brake	Ball Bearing	4-3/8"	33.60
MO612	4" (102 mm)	240 lbs. (108 kg.)	Swivel w/Brake	Plain Bore	5-3/8"	27.50
MO613	4" (102 mm)	240 lbs. (108 kg.)	Swivel w/Brake	Ball Bearing	5-3/8"	33.50
MO614	5" (127 mm)	265 lbs. (120 kg.)	Swivel w/Brake	Plain Bore	6-5/16"	31.40
MO615	5" (127 mm)	265 lbs. (120 kg.)	Swivel w/Brake	Ball Bearing	6-5/16"	38.60

MEDIUM-HEAVY DUTY CASTERS

GENERAL PURPOSE

- 9/16" diameter rivet
- 3/8" diameter axle and lock nut
- Brake type: Top locking
- 1/4" diameter upper race; 1/4" diameter lower race
- Corrosion resistant bright zinc finish

Excellent for:

- Medium-duty applications
- Mobile warehousing equipment
- Stock trucks

Plate size: 2 3/4" x 3 3/4"

Bolt holes: 1 3/4" x 2 13/16"

Bolt hole size: 5/16"



Wheel Dia"	Tread Width"	Bearing Type	Cap. lbs.	Swivel Radius"	Overall Height"	Wheel Type	Swivel Model No.	Price /Each	Rigid Model No.	Price /Each	Swivel w/brake Model No.	Price /Each	Rigid w/ side brake Model No.	Price /Each
3	1 1/4	Nylon	400	2 7/8	4	Phenolic	MG199	15.50	MG200	10.90	MH453	20.90	MH454	22.90
3	1 1/4	Nylon	300	2 7/8	4	Steel	MG201	14.50	MG202	10.50	MH455	19.90	MH456	21.90
3	1 1/4	Steel	350	2 7/8	4	Urethane	MG203	12.90	MG204	8.09	MH457	17.90	MH458	19.90
3	1 1/4	Steel	350	2 7/8	4	Urethane Grey	MG205	12.90	MG206	8.09	MH459	17.90	MH460	19.90
4	1 1/4	Steel	400	3 1/2	5	Phenolic	MG207	15.50	MG208	11.90	MH461	20.90	MH462	23.50
4	1 1/4	Steel	300	3 1/2	5	Steel	MG209	17.90	MG210	13.50	MH463	22.90	MH464	24.90
4	1 1/4	Steel	350	3 1/2	5	Urethane	MG211	13.50	MG212	9.29	MH465	18.90	MH466	21.50
4	1 1/4	Steel	350	3 1/2	5	Urethane Grey	MG213	13.50	MG214	9.29	MH467	18.90	MH468	21.50

HEAVY-DUTY 550-LB. CAPACITY

- 9/16" diameter rivet
- 3/8" drilled axle and lock nut
- Corrosion resistant bright zinc finish
- Available with brake
- 1/4" diameter upper raceway
- 1/4" diameter lower raceway (equal diameter raceway)


Excellent for:

- Platform trucks
- Food service equipment
- Hotel equipment
- Factory use
- Textile carts

Plate size: 3 27/32" x 4 1/2"

Holes slotted for: 2 5/8" to 3" x 3" to 3 5/8"

Bolt hole size: 3/8"

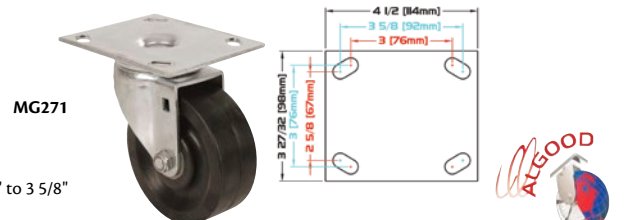

Wheel Dia"	Tread Width"	Bearing Type	Cap. lbs.	Swivel Radius"	Overall Height"	Wheel Type	Swivel Model No.	Price /Each	Rigid Model No.	Price /Each
4	1 1/2	Roller	350	3 5/16	5 1/8	Mold-On Rubber	MG263	26.90	MG264	22.90
4	1 1/2	Roller	400	3 5/16	5 1/8	Polyolefin	MG265	22.90	MG266	18.90
4	1 1/2	Roller	600	3 5/16	5 1/8	Phenolic	MG267	26.50	MG268	22.50
4	1 1/2	Roller	600	3 5/16	5 1/8	Steel	MG269	29.90	MG270	25.90
4	1 1/2	Roller	600	3 5/16	5 1/8	Envirothane™	MG271	30.90	MG272	27.50
4	1 1/2	Roller	600	3 5/16	5 1/8	V-Groove	MG273	32.90	MG274	28.90
4	1 1/2	Roller	700	3 5/16	5 1/8	RollX™ Nylon	MN825	27.50	MN829	22.90
4	1 1/2	Roller	700	3 5/16	5 1/8	Lava™ High Temp Nylon	MN826	33.90	MN830	28.90
5	1 1/2	Roller	350	3 15/16	6 1/8	Mold-On Rubber	MG275	27.90	MG276	23.90
5	1 1/2	Roller	450	3 15/16	6 1/8	Polyolefin	MG277	24.50	MG278	19.90
5	1 1/2	Roller	600	3 15/16	6 1/8	Phenolic	MG279	29.90	MG280	25.90
5	1 1/2	Roller	600	3 15/16	6 1/8	Steel	MG281	33.50	MG282	29.50
5	1 1/2	Roller	700	3 15/16	6 1/8	Envirothane™	MG283	35.50	MG284	31.50
5	1 1/2	Roller	700	3 15/16	6 1/8	RollX™ Nylon	MN827	28.90	MN831	25.50
5	1 1/2	Roller	700	3 15/16	6 1/8	Lava™ High Temp Nylon	MN828	38.50	MN832	33.50