


CONTRACTOR SERIES

- Direct drive units have splash lubricated pump with cast iron sleeve for longer life
- Belt drive units have durable cast iron pumps
- Splash type lubrication
- All cast iron pumps have steel valves for longer life
- Flywheels designed for excellent pump cooling
- Manual reset for overload protection
- Dual control-start/stop with pressure switch or constant speed operation for electric belt drive unit
- All gas units equipped with Honda® gas engines
- Idle-down throttle control for gas belt drive units
- Air outlet accepts 1/4" industrial male quick connector
- All units are factory tested prior to shipment
- 1-year warranty



TFA011

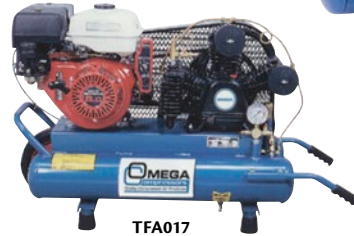


TFA017



TFA012



TFA014

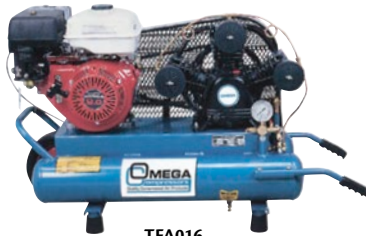

TFA016



TFA013

Model No.	Mfg. No.	Peak HP	Running HP @ 90 PSI	Actual FAD-CFM 90 PSI 125 PSI	Max. PSI	Voltage /Phase	Tank Size (gal.)	Noise Level dBA	Amp Draw @ 125 PSI	Pump RPM	Wt. lbs.	Remarks	Price /Each
TFA011	DP-2004V	2	1.5	6.0 4.6	125	115 V/1 PH	3.2	83	12	3450	55	Pan-Cake	626.00
TFA012	DP-2022H	2	1.5	6.0 4.6	125	115 V/1 PH	4	83	12	3450	65	Twin-Stack	626.00
TLV736	PUK-1508MDC	1.5	1.5	6.6 6.0	125	115 V/1 PH	8	70	15	1100	210	Twin-Tank	1194.00
TFA013	PUK-2008MDC	2	2.0	9.5 8.0	125	115 V/1 PH	8	70	22	900	200	Twin-Tank	1353.00
TFA014	PUK-5508G	5.5	5.5	12.5 10.5	125	5.5 HP Gas	8	90 Run/82 Idle	N/A	1100	190	Twin-Tank	1781.00
TFA015	PUK-5520G	5.5	5.5	12.5 10.5	125	5.5 HP Gas	20	90 Run/82 Idle	N/A	1100	190	20 gal. portable	1905.00
TFA016	PUK-9008G	9	9	20.6 17.6	125	9 HP Gas	8	90 Run/82 Idle	N/A	1100	250	Twin-Tank	2830.00
TFA017	TUE-8008GE	8	8	15.6 12.5	175	8 HP Gas	8	90 Run/82 Idle	N/A	1100	250	Electric Start	3106.00

PROFESSIONAL SERIES

- Quiet operation
- All units are belt driven
- Durable cast iron pumps
- Splash type lubrication
- All cast iron pumps have steel valves for longer life
- Flywheels designed for excellent pump cooling
- Manual reset for overload protection
- Portable units equipped with built-in regulator, pressure gauges and on/off switch
- Fully assembled - require handle and wheel attachment
- Air outlet accepts 1/4" industrial male quick connector
- All units are factory tested prior to shipment
- For professional and automotive applications
- 1-year warranty



TFA019



TFA021



TFA022



TFA023



TFA024

Model No.	Mfg. No.	HP	Actual FAD-CFM 40 PSI 90 PSI	Max. PSI	Voltage /Phase	Tank Size (gal.)	Noise Level dBA	Wt. lbs.	Remarks	Price /Each
TFA019	PK-2008	2	4.0 3.2	125	115 V/1 PH	8	80	90	Horizontal-Portable	658.00
TFA020	PK-3011	3	6.0 5.3	125	115 V/1 PH	11	80	110	Horizontal-Portable	805.00
TFA021	PK-5020	5	7.8 6.4	125	115 V/1 PH	20	70	150	Horizontal-Portable	1084.00
TFA022	PK-5020VP	5	7.8 6.4	125	115 V/1 PH	20	70	150	Vertical-Portable	1100.00
TFA023	PP-6060V	6	12.5 11.0	125	230 V/1 PH	60	75	300	Vertical-15 A Motor	1523.00
TFA024	PK-6560V	6.5	20.0 18.0	125	230 V/1 PH	60	75	330	Electric Start	2084.00