

TORQUE WRENCHES

DIAL TORQUE WRENCH

- Large easy-to-read dial
- Fast, accurate and easy to set in any industrial workplace
- Accuracy: $\pm 3\%$ CW $\pm 4\%$ CCW
- Includes custom molded plastic case



Model No.	Mfg. No.	Capacity		Increments		Drive Type"	Overall Length"	Price /Each
NKE124	DIN75B	0-75 in.-lbs.	0-9 Nm	5 in.-lbs.	0.25 Nm	1/4 Square	10.5	302.00
NKE123	DIN250B	0-250 in.-lbs.	0-30 Nm	5 in.-lbs.	0.50 Nm	3/8 Square	10.5	306.00
NJI147	DIN600B	0-600 in.-lbs.	0-70 Nm	10 in.-lbs.	2.0 Nm	3/8 Square	10.5	309.00

DIAL TORQUE WRENCH WITH MEMORY NEEDLE


- Large easy-to-read dial
- Fast, accurate and easy to set in any industrial workplace
- Accuracy: $\pm 3\%$ CW $\pm 4\%$ CCW
- Includes custom molded plastic case



Model No.	Mfg. No.	Capacity		Increments		Drive Type"	Overall Length"	Price /Each
QP111	DFN50B	0-50 ft.-lbs.	0-70 Nm	1 ft.-lbs.	2 Nm	3/8 Square	10.5	307.00
NJI146	DFN250B	0-250 ft.-lbs.	0-350 Nm	5 ft.-lbs.	10 Nm	1/2 Square	21.5	307.00
TYR658	DFE1000	0-1000 ft.-lbs.	0-1400 Nm	20 ft.-lbs.	25 Nm	1 Square	74	1869.00

HEAVY-DUTY MICRO-ADJUSTABLE TORQUE WRENCH

- Power Source: AC
- Type Of Bulb: LED
- Measurement System: Metric
- Rugged metal knurled handles
- Quick-release button for faster socket retention and removal
- Can be trusted in any automotive, aircraft, marine and industrial applications
- Operates and ratchets in both left and right hand directions
- Includes custom molded plastic case

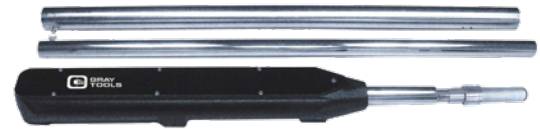

Model No.	Mfg. No.	Drive Type"	Capacity		Increments		Overall Length"	Head Style	Price /Each
NJH064	81250	1/4 Square	30-250 in.-lbs.	4-28.8 Nm	1 in.-lbs.	0.11 Nm	12 1/2	Fixed	291.00
NJH066	82250	3/8 Square	30-250 in.-lbs.	4-28.8 Nm	1 in.-lbs.	0.11 Nm	12 1/2	Fixed	293.00
TYW979	MFR80FL	3/8 Square	10-80 ft.-lbs.	13.5 - 108.5 Nm	0.5 ft.-lbs.	1.4 Nm	16 1/2	Flex	365.00
NJH065	82100	3/8 Square	10-100 in.-lbs.	23.7-139 Nm	0.5 ft.-lbs.	0.7 Nm	17	Fixed	300.00
NJH070	83250	1/2 Square	30-250 in.-lbs.	47.5-345.8 Nm	1 ft.-lbs.	1.4 Nm	22	Fixed	369.00
TY272	MFR250H	1/2 Square	30-250 in.-lbs.	47-332 Nm	1 ft.-lbs.	1.4 Nm	24 1/4	Fixed	401.00
NJH075	84600	3/4 Square	100-600 in.-lbs.	169-847 Nm	5 ft.-lbs.	7.0 Nm	46	Fixed	1101.00
TY273	MFR600H	3/4 Square	100-600 in.-lbs.	169-779 Nm	5 ft.-lbs.	6.8 Nm	43	Fixed	1190.00
TYR634	MF2000	1 Square	300-2000 ft.-lbs.	474-2700 Nm	10 ft.-lbs.	13.5 Nm	109	Fixed	6740.00

TORQUE MULTIPLIER

- Accuracy: $\pm 5\%$



Model No.	Mfg. No.	Max Input Torque		Max Output Torque		Input Drive"	Output Drive"	Weight With Case	Price /Each
TYR665	TM750A	227	303	750	1017	1/2 F	3/4 M	4 lbs.	1489.00
TYR662	TM1200	200	271	1200	1627	1/2 F	3/4 M	12.5 lbs.	2739.00
TYR663	TM2200	162	271	2200	2983	1/2 F	1 M	15.2 lbs.	4965.00
TYR664	TM3200	173	235	3200	4339	1/2 F	1 M	19.9 lbs.	6221.00

BEAM TORQUE WRENCH

- Scale includes both SAE (In/Lb, Ft/Lb) and Metric (Nm)
- Serviceable by bending pointer to zero before use
- Palm-fit handle pivots on beam to maintain constant distance from drive point to load point for precise measurement
- Directly measure a variety of torque values when tightening fasteners
- Pointer moves clockwise or counter-clockwise ($\pm 7\%$) to measure torque



TDS979

GEARWRENCH

Model No.	Mfg. No.	Overall Length"	Drive Type"	Torque Range	Increments	Tool Weight lbs.	Price /Each
TDS979	2955D	11	1/4 Square	0-60 in.-lbs.	2.5 in.-lbs.	0.85	61.60
TDS941	2956D	16	3/8 Square	0-600 in.-lbs.	50 in.-lbs.	1.45	84.40
TDS949	2957N	20	1/2 Square	0-150 ft.-lbs.	5 ft.-lbs.	1.89	92.20

MICROMETER TORQUE WRENCHES

- Pliable, elastomer handle grip for superior comfort and oil resistance
- Accurate in clockwise direction $\pm 3\%$ in upper 80% of the range
- Micrometer twist lock ring provides secure locking mechanism
- Sealed tear-drop head provides access and strength and keeps out contaminants



TLV411

GEARWRENCH

Model No.	Mfg. No.	Drive Type"	Torque Range	Price /Each
TLV411	85060	1/4 Square	30-200 in.-lbs.	169.00
TLV412	85061	3/8 Square	25-250 in.-lbs.	193.00
TLV413	85062	3/8 Square	10-100 ft.-lbs.	185.00
TLV414	85066	1/2 Square	30-250 ft.-lbs.	205.00