

FALL PROTECTION

MILLER® ARC-RATED SHOCK-ABSORBING LANYARD

- Designed to protect workers from electric arc-flash and arc-blast exposure
- Arc-rated Kevlar® webbing
- Available with Kevlar® choke-off loop for a "metal-less" connection
- Arc-Flash Standards: ASTM F887-05
- Connectors' Gate Load Capacity: 3600 lbs.
- Shock Absorber Type: Pack
- CSA Minimum Mass: 120 lbs.
- CSA Maximum Mass: 335 lbs.

Certification(s): CSA Standard Z259.11

Honeywell
MILLER

SGT531



V-SERIES STANDARD LANYARDS

MSA

- The New V-Series shock absorbing lanyard line simplifies product selection by offering a concise line of standard lanyards that meet a wide range of customer needs
- Includes a clear, durable protective cover on the labels to increase service life, and allow for easy inspection
- Meets the new CSA Z259.11-17 standard for shock absorbing safety lanyards, with a current selection of standard (150-310 lbs.) and lightweight (100-230 lbs.) worker options

SGK246



Model No.	Mfg. No.	Length'	No. of Legs	Harness Connection	Anchorage Connection	Price /Each
GREY						
SGT522	M1FSFC-ES6C	6	One	Locking Snap Hook	Scaffold Hook	218.00
SGT506	M1FSFS-ES6C	6	One	Locking Snap Hook	Locking Snap Hook	182.00
SGT531	M1WLFC-ES6C	6	One	Choke-Off Loop	Scaffold Hook	188.00
SGT512	M1WLFS-ES4C	4	One	Choke-Off Loop	Locking Snap Hook	165.00
SGT537	M1WLFS-ES5C	5	One	Choke-Off Loop	Locking Snap Hook	132.00
SGT502	M1WLFS-ES6C	6	One	Choke-Off Loop	Locking Snap Hook	174.00
SGT544	M2FSFC-ES6C	6	Two	Locking Snap Hook	Scaffold Hook	405.00
SGT529	M2FSFS-ES6C	6	Two	Locking Snap Hook	Locking Snap Hook	376.00
BLACK						
SGT533	M1FSFC-KS6C	6	One	Locking Snap Hook	Scaffold Hook	130.00
SGT541	M1FSFS-KS4C	4	One	Locking Snap Hook	Locking Snap Hook	255.00
SGT493	M1FSFS-KS6C	6	One	Locking Snap Hook	Locking Snap Hook	248.00
SGT471	M2FSFS-KS6C	6	Two	Locking Snap Hook	Locking Snap Hook	114.00

Model No.	Mfg. No.	Number of Legs	Anchorage Connections	Length'	Price /Each
CSA (150-310 LBS.)					
SGK246	10188100	One	36C Small Snap Hook	6	67.40
SGK956	10188102	Two	36C Small Snap Hook	6	117.00
SGK957	10188103	One	36L Large Snap Hook	6	102.00
SGK958	10188101	Two	36L Large Snap Hook	6	148.00
LIGHTWEIGHT CSA (100-230 LBS.)					
SGK959	10190397	One	36C Small Snap Hook	6	67.40
SGK960	10190399	Two	36C Small Snap Hook	6	90.30
SGK961	10190398	One	36L Large Snap Hook	6	102.00
SGK962	10190400	Two	36L Large Snap Hook	6	148.00

V-SERIES TIE-BACK LANYARDS

- A new easy identifiable symbol system to indicate the type of lanyard
- 5000 pound gate strength in any direction allows the FP5K carabiner to be tied directly to the lanyard
- Unique carabiner body shape that helps avoid confusion with standard connectors not designed for tie-back applications
- Meets the new CSA Z259.11-17 standard for shock absorbing safety lanyards, with a current selection of standard (150-310 lbs.)

Model No.	Mfg. No.	Number of Legs	Anchorage Connection	Length'	Price /Each
SGK963	10193943	One	36C Small Snap Hook	6	144.00
SGK964	10193944	Two	36C Small Snap Hook	6	209.00

MSA



REBEL™ WEB SELF-RETRACTING LIFELINES

- Self-locking hooks
- Great value with superior features
- Compact and lightweight
- Swivel carabiner anchorage connection
- Certified to CSA standard Z259.2.2

SEB349



REBEL™ SELF RETRACTING LIFELINE – LEADING EDGE

- Lifeline Material: Galvanized Cable
- Harness Connection: Snap Hook
- Anchorage Connection: Carabiner
- Certification(s): CSA Standard Z259.2.2
- Rugged and extremely lightweight thermoplastic housing
- Stackable housing design
- Built-in carrying handle
- Galvanized steel cable lifeline is abrasion resistant and extremely durable
- Internal energy absorption system
- Swiveling self-locking snap hook with impact indicator
- Reserve lifeline system
- Swiveling anchorage point
- Side lifeline exit with ergonomic handle
- High strength, corrosion resistant components
- Self-locking anchorage carabiner keeps the SRL securely attached to the anchorage device
- SE5695:** Designed for the abusive leading edge applications, incorporating over-sized cable and an external energy absorption system that helps maintain lifeline integrity over abrasive edges



3M

PROTECTA
Fall Protection



Model No.	Mfg. No.	Length'	Harness Connection	Lifeline	Price /Each
TYPE 1					
SDP278	3100406	6	Snap Hook	Web	181.44
SDP279	3100407	6	Swivel Snap Hook	Web	190.72
SEB349	3100429	10	Swivel Snap Hook	Web	277.31
TYPE 2					
SEB350	3100435	20	Swivel Snap Hook	Web	510.30

3M

PROTECTA
Fall Protection




Model No.	Mfg. No.	Length'	Thickness"	Price /Each
SE5695	3590541	20	7/32	706.12
SEE717	3590502	33	3/16	623.00
SEE718	3590552	50	3/16	706.12

FALL PROTECTION

NANO-LOK™ SELF-RETRACTING LIFELINES

- Extremely compact, lightweight design
- Tough and impact-resistant thermoplastic housing
- Swiveling anchorage loops
- Quick-activating speed-sensing brake systems
- Protected labels, equipped with i-Safe™
- Lifeline Length: 6'
- Certified to CSA standard Z259.2.2

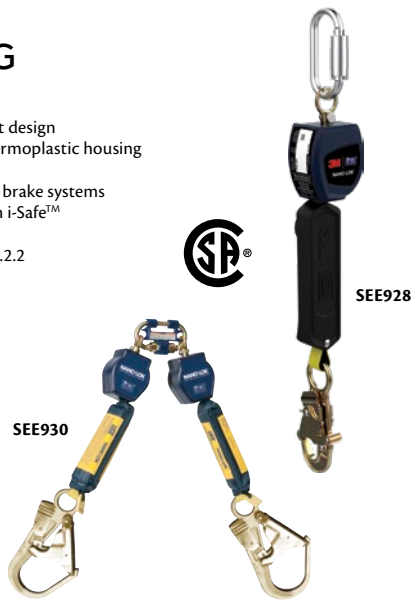

Model No.	Mfg. No.	No. of SRLs	Harness Connection	Anchorage Connection	Price /Each
SEE929	3101230	1	Direct	Aluminum Carabiner	251.00
SEP794	3101232	1	Direct	Aluminum Rebar Hook	311.00
SEP904	3101245	1	Direct	Steel Snap Hook	208.00
SEE928	3101258	1	Direct	Steel Swivel Hook	284.00
SES651	3101222	1	Direct	Steel Rebar Hook	260.00
SES652	3101223	1	Direct	Steel Snap Hook	217.00
SGD985	3101676	1	Direct	Aluminum Rebar Hook	260.00
SEE930	3101286	2	Direct	Steel Rebar Hooks	535.00
SEE931	3101283	2	Direct	Aluminum Rebar Hooks	590.00
NJS982	3101311	2	Direct	Aluminum Snap Hooks	606.00

NANO-LOK™ EDGE SELF-RETRACTING LIFELINES

- Suitable for applications when workers are anchored lower than the elevation of the dorsal d-ring on their full-body harness and/or the extracted lifeline can bear against an edge or surface during fall arrest
- Extremely compact, lightweight design
- Tough and impact-resistant thermoplastic housing
- Swiveling anchorage loops
- Quick-activating speed-sensing brake systems
- High-capacity external energy absorbers and impact indicators
- i-Safe™ equipped
- Certified to CSA standard Z259.2.2
- Lifeline Material: Stainless Steel
- Harness Connection: Direct



Model No.	Mfg. No.	No. of SRLs	Anchorage Connection	Price /Each
SEJ600	3500217	1	Snap Hook	364.00
SEJ601	3500218	1	Swivel Snap Hook	378.00
SEJ607	3500251	1	Rebar Hook	391.00
SEJ604	3500221	1	Aluminum Carabiner	378.00
SGD989	3500260	1	Comfort Grip Snap Hook	472.00
SEJ608	3500232	2	Snap Hooks	626.00
SEJ609	3500233	2	Swivel Snap Hooks	655.00
SEJ615	3500250	2	Rebar Hooks	681.00
SEJ614	3500238	2	Aluminum Rebar Locking Hooks	681.00
SGD988	3500259	2	Comfort Grip Snap Hook	706.00

SMART LOCK SELF-RETRACTING LIFELINES

- Rugged and extremely lightweight thermoplastic housing with built in ergonomic handle
- 4ft. fall clearance allows workers up to 310 lbs. to meet OSHA's 1910 general industry rule
- Patented magnetic retraction control system allows lifeline retract smoothly, hands free
- Swiveling anchorage point and carabiner included
- Patented dual label system located within ergonomic cable handle to simplify inspections and reduce the need for replacement
- Swiveling snap hook with impact indicator
- Connected Safety RFID located in cable handle
- Certified to CSA Z259.2.2



Model No.	Mfg. No.	Description	Price /Each
SGJ254	3503800	Galvanized Cable, 30'	1074.68
SGJ255	3503801	Stainless Steel Cable, 30'	1201.75
SGJ256	3503803	Galvanized Cable, 20'	885.00
SGJ257	3503804	Stainless Steel Cable, 20'	1190.00
SGJ258	3503821	Stainless Steel Cable, 35'	1385.18
SGJ259	3503823	Stainless Steel Cable, 50'	1428.30
SGJ260	3503824	Galvanized Cable, 50'	1301.23
SGJ261	3503802	Galvanized Cable, 20' - Leading Edge	933.00
SGJ262	3503822	Galvanized Cable, 30' - Leading Edge	1301.80

ULTRA-LOK™ SELF-RETRACTING LIFELINES

- Galvanized wire rope lifeline
- Maximum durability with minimal weight
- Stainless steel working components for corrosion resistance
- Durable polyurethane housing and aluminum side plates
- Anti-ratcheting, twin disc brake system limits arresting forces to 900 lbs. (4 kN) or less
- Smooth performance
- Swivel snap hook harness connection and steel hook anchorage connection
- Certified to CSA standard Z259.2.2



Model No.	Mfg. No.	Length'	Price /Each
SEB347	3504433C	20	1157.14
SEB345	3504430C	30	1446.93
SEB348	3504450C	50	1797.95

FALL PROTECTION

SEALED BLOK™ SELF-RETRACTING LIFELINES

30' Sealed Blok™ self-retracting lifeline that features a retrieval bracket and swivelling snap hook with impact indicator

- New sealed design keeps the critical working components (brake, power spring, energy absorber) free of dirt, grease, water and chemicals
- Built-in carrying handle makes transport and anchoring safe and easy, and provides a secondary "dropped objects protection" attachment point
- Large pivoting anchorage handle stays in line with load for added security and allows use of a variety of connecting hardware
- Anti-ratcheting brake stops falls within inches and limits arresting forces to 900 lbs. for added safety
- Cast aluminum housing and heavy gauge steel end plates resist damage and provide corrosion resistance
- Self-locking swivel hook with impact indicator makes connections easy, and provides a visual means of inspection
- Certified to CSA standard Z259.2.2

Model No. SE5589
Mfg. No. 3400850C
Price/Each \$3786.73



3M

SALA

Fall Protection

MINILITE™ FALL LIMITERS

- Lightweight, compact design – only 2.5 lbs.
- Corrosion-resistant interior, frame and components
- Visual load indicator
- Quick-activating, high-strength stainless steel braking system
- Arrests free falls within inches
- Fits in the palm of your hand
- Provides the best overall value when compared with competitive units
- High-impact protective outer cover
- Prominent reflective labeling
- Available with a variety of integral anchorage connectors
- Snap hook harness connection
- Length: 11'
- Certified to CSA standard Z259.2.2

SG987



SA

Honeywell
MILLER

Model No.	Mfg. No.	Anchorage Connection	Price /Each
SG987	FL11-3-Z7/11FT	Twist Lock Carabiner and Swivel Shackle	501.00
SG988	FL11-Z7/11FT	Not Included	377.00
SG989	FL11-1-Z7/11FT	Twist Lock Carabiner	432.00

MILLER® SCORPION™ PERSONAL FALL LIMITERS

- Greater versatility through dual operation:
 - For use as a personal fall limiter or as a traditional retractable lifeline (utilizing a variety of anchorage connectors)
- Small, lightweight design: 2.9 lbs. (1.3 kg)
- Quick-activating, high-strength stainless steel braking system - arrests free falls within inches
- No annual factory recertification required
- Visual load indicator - indicates when the unit must be removed from service
- Variety of integral anchorage connectors available
- 400-lb. (181.4 kg) capacity models available upon request
- Locking snap hook harness connection
- Length: 9'
- Certified to CSA standard Z259.2.2



SAK314

Honeywell
MILLER

Model No.	Mfg. No.	Anchorage Connection	Price /Each
SAK314	PFL-4-Z7/9FT	Carabiner and Swivel Shackle	482.00

MILLER® TURBOLITE™ & TWIN TURBO™ PERSONAL FALL LIMITERS

- First affordable alternative to shock-absorbing lanyards
- Compact and lightweight PFL, workers will no longer need to "switch-out" equipment to maintain a safe fall distance
- Extremely compact and lightweight 1.9 lbs. (0.86 kg)
- Unit attaches directly to the harness back D-ring for greater mobility and versatility
- Engineered webbing for greater abrasion resistance and long service life
- High-strength, impact-resistant nylon housing for maximum durability
- Built-in swivel prevents lifeline from twisting
- Rated for up to a 400 lbs. (181.4 kg) user
- Quick-activating, high-strength stainless steel braking system
- Twin-Turbo™ models feature a G2 connector and 2 legs for 100% tie off
- Certified to CSA standard Z259.2.2

SA



SEJ630

SAR481

Honeywell
MILLER

Model No.	Mfg. No.	Length'	Harness Connection	Anchorage Connection	Price /Each
TURBOLITE™					
SAR481	MFL-1-Z7/6FT	6	Steel Twist-Lock Carabiner	Locking Snap Hook	234.00
SAR482	MFL-3-Z7/6FT	6	None	Locking Snap Hook	204.00
SAR483	MFL-11-Z7/6FT	6	Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook	258.00
SEJ629	MFL-12-Z7/6FT	6	Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook	325.00
SEJ633	MFL-1-Z7/9FT	9	Steel Twist-Lock Carabiner	Locking Snap Hook	297.00
SEJ634	MFL-5-Z7/9FT	9	None	Swivel Snap Hook	303.00
SEJ635	MFL-11-Z7/9FT	9	Aluminum Twist-Lock Carabiner	Aluminum Locking Snap Hook	325.00
SEJ636	MFL-12-Z7/9FT	9	Aluminum Twist-Lock Carabiner	Aluminum Locking Rebar Hook	378.00
TWIN TURBO™**					
SEJ630	MFLC-3-Z7/6FT	6	G2 Connector	Locking Snap Hooks	490.00
SEJ631	MFLC-4-Z7/6FT	6	G2 Connector	Locking Rebar Hooks	625.00
SEJ632	MFLC-12-Z7/6FT	6	G2 Connector	Aluminum Locking Rebar Hooks	585.00

* Also available in 9' length

BLACK RHINO™ SELF-RETRACTING LIFELINES

- Repairable; no annual factory recertification required
- Ideal for concrete construction, welding, steel erection and warehouse applications
- Quick-activating, high-strength stainless steel braking system
- Variety of integral anchorage connectors available
- Integral load indicator - indicates when the unit must be removed from service
- Extended service life - corrosion-resistant stainless steel and aluminum components
- Integral internal shock absorber - consistently reduces fall forces to 900 lbs./f (4 kN) or less for greater safety
- Length: 9'
- Certified to CSA standard Z259.2.2



SAK313

SA

Honeywell
MILLER

Model No.	Mfg. No.	Harness Connection	Anchorage Connection	Price /Each
SAK313	CFL-5-Z7/9FT	Locking Swivel Snap Hook	Locking Swivel Rebar Hook	870.00
SEJ641	CFL-4-Z7/9FT	Locking Swivel Snap Hook	Swivel and Twist Lock Carabiner	789.00

FALL PROTECTION

MILLER® TURBOLITE™ EXTREME SHARP EDGE PERSONAL FALL LIMITER

- Designed for use in sharp edge applications with radius ≥ 0.005 in (0.13 mm)
- Meets ANSI Z359.14 Class B and Leading Edge requirements
- Two buttons on harness connector positioned on two different planes require two distinct actions, preventing accidental disengagement
- Lightweight, compact harness connector with free-floating shock-absorber pack keeps workers cooler, and provides a more comfortable work experience
- Lifeline Material: Galvanized Steel
- Swivel or Stationary: Swivel
- Unit Connector: Without Unit Connector
- Unit Connector Material: Aluminum
- CSA Certification: SRL-LE



Honeywell
MILLER

Model No.	Mfg. No.	Lifeline Length'	No. of SRLs	Lifeline Connector	Price /Each
SGQ377	MFLEC-11/9FTC	9	1	Aluminum Snap Hook	491.00
SGQ378	MFLEC-12/6FTC	6	1	Aluminum Rebar Hook	456.00
SGQ379	MFLEC-12/9FTC	9	1	Aluminum Rebar Hook	487.00
SGQ382	MFLEC-3/6FTC	6	1	Steel Snap Hook	409.00
SGQ383	MFLEC-3/9FTC	9	1	Steel Snap Hook	453.00
SGQ384	MFLEC-4/6FTC	6	1	Steel Rebar Hook	446.00
SGQ385	MFLEC-4/9FTC	9	1	Steel Rebar Hook	491.00
SGQ388	MFLEC2-12/6FTC	6	2	Aluminum Rebar Hook	803.00
SGQ389	MFLEC2-12/9FTC	9	2	Aluminum Rebar Hook	847.00
SGQ392	MFLEC2-3/6FTC	6	2	Steel Snap Hook	755.00
SGQ393	MFLEC2-3/9FTC	9	2	Steel Snap Hook	778.00
SGQ394	MFLEC2-4/6FTC	6	2	Steel Rebar Hook	787.00
SGQ395	MFLEC2-4/9FTC	9	2	Steel Rebar Hook	831.00

MIGHTYLITE™ SELF-RETRACTING LIFELINES

Perfect solution for an array of construction, industrial, warehouse, utility, telecommunications, agriculture, mining and confined space applications.

- Ideal for hard-to-mount locations
- Corrosion-resistant stainless steel and aluminum components extend service life
- Carabiner and tagline included
- Locking snap hook harness connection and carabiner anchorage connection
- Length: 20'
- Rated to 310 lbs. (140.6 kg) capacity
- Certified to CSA standard Z259.2.2



Honeywell
MILLER

Model No.	Mfg. No.	Lifeline	Price /Each
SD001	RL20P-Z7/20FT	1" Polyester Webbing	1447.00
SD002	RL20G-Z7/20FT	3/16" Galvanised Cable	1539.00
SD003	RL20SS-Z7/20FT	3/16" Stainless Steel Cable	1657.00

MIGHTEVAC™ SELF-RETRACTING LIFELINES

- Combines the MightyLite self-retracting lifeline series with a quick-activating retrieval mechanism for emergency evacuation
- 20% lighter than competitive models
- Provides quick and easy rescue with a 4:1 mechanical advantage (average speed of 25 feet per minute)
- Durable, field-tested construction
- Corrosion-resistant stainless steel/aluminum components
- Convenient, heavy-duty carrying handle
- Galvanised wire rope lifeline
- Locking snap hook harness connection and carabiner anchorage connection
- Also available with stainless steel wire rope and Kevlar® rope upon request
- 310 lbs. weight capacity
- Certified to CSA standard Z259.2.2



Honeywell
MILLER

Model No.	Mfg. No.	Length'	Price /Each
W/O MOUNTING BRACKET			
SAH519	MR50G-Z7/50FT	50	4687.00
SAH520	MR100G-Z7/100FT	100	6467.00
SAH521	MR130G-Z7/130FT	130	6850.00
W/MOUNTING BRACKET			
SAH522	MR50GB-Z7/50FT	50	4968.00
SAH523	MR100GB-Z7/100FT	100	6635.00
SAH524	MR130GB-Z7/130FT	130	6982.00

FALL PROTECTION

LATCHWAYS® PERSONAL FALL LIMITER

- Compact and lightweight personal fall limiter
- New design eliminates the need for an external energy-absorber outside of the housing
- High-impact polycarbonate transparent housing allows for easy visual inspection of internal components
- 360° fully rotating attachment point for complete flexibility
- Requires zero recalibration or adjustment
- Stainless steel components
- High-tensile steel, zinc-plated snap hook
- Swivel or Stationary: Swivel
- Unit Connector: Carabiner
- Unit Connector Material: Steel
- Lifeline Connector: Snap Hook
- Lifeline Connector Material: Steel
- Certified to CSA standard Z259.2.2

SFU592



V-TEC™ PERSONAL FALL LIMITER

- Compact and lightweight
- New design eliminates the need for an external energy-absorber outside of the housing
- High-impact polycarbonate transparent housing allows for easy visual inspection of internal components
- 360° fully rotating attachment point for complete flexibility
- Requires zero recalibration or adjustment
- Stainless steel components
- Certified to CSA standard Z259.2.2

SGC215



SFU591


MSA

Model No.	Mfg. No.	Lifeline Length'	No. of SRLs	Lifeline Material	Price /Each
SFU592	63013-00F	10	1	Web	308.00
SGI029	63203-00ACA	10	1	Polyester	480.00

MSA

Model No.	Mfg. No.	Lifeline	Harness Connection	Anchorage Connection	Price /Each
SGC214	63011-00B	6' Web	Carabiner	Snap Hook	239.00
SGC215	63111-00A	6' Web	Twin-Link Connector	Scaffold Hook	625.00
SGD369	63011-00A	6' Web	Carabiner	Scaffold Hook	320.00
SFU591	63013-00E	10' Web	Carabiner	Snap Hook	324.00

V-SHOCK™ MINI PERSONAL FALL LIMITER

- A rugged overmold housing provides unsurpassed durability in abusive environments
- A swivel eyelet provides better worker mobility and versatility by preventing the tangling of the lifeline and not impeding worker movement
- Very lightweight; less weight on the back reduces fatigue and increases productivity
- The radial energy absorber is protected and sealed off from the outside environment which extends the life cycle of the unit
- Certified to CSA Z259.2.2
- Lifeline Length: 6'
- Lifeline Material: Polyester

SGI031



SGI036


MSA

Model No.	Mfg. No.	No. of SRLs	Harness Connection	Anchorage Connection	Price /Each
SGI031	64011-00ACA	1	Carabiner	Scaffold Hook	345.00
SGI032	64011-00BCA	1	Carabiner	Snap Hook	258.00
SGI035	64111-00ACA	2	Twin-Link Connector	Scaffold Hook	675.00
SGI036	64111-00BCA	2	Twin-Link Connector	Snap Hook	510.00

WORKMAN™ SELF RETRACTING LIFELINES

- Lightweight design
- Durable thermoplastic housing
- Impact-absorbing bumpers for added durability
- Integral ergonomic carrying handle for easy transport and installation
- Swivel snap hook with load indicator greatly limits twisting of cable and alerts users when the device has been involved in a fall
- Certified to CSA standard Z259.2.2

SDL521


MSA

Model No.	Mfg. No.	Lifeline	Price /Each
SDL521	10119507	30' Galvanized Cable	713.00
SDL522	10120724	30' Stainless Steel Cable	754.00
SDL523	10121834	50' Galvanized Cable	924.00
SDL524	10121778	50' Stainless Steel Cable	994.00

FALL PROTECTION

CABLE LADDER SAFETY SYSTEMS

- The Lad-Saf™ flexible cable system consists of a top and bottom bracket that act as anchors for a steel cable that runs the length of the climbing area
- A Lad-Saf™ sleeve connects the worker to the system, automatically follows the user during the climb, and locks on to the cable in the event of a fall
- Designed for ease of use, economy, and versatility
- Integrated tension indicating bottom brackets take the guess work out of installation
- Galvanized and stainless steel construction stands up to harsh environments for added longevity
- Integrated shock absorbing top bracket reduces forces imposed on ladder during a fall
- Intermediate cable guides prevent cable wear against the ladder and permit the climber to bypass without disconnecting
- Complete system includes both top and bottom brackets, cable and cable guides. They do not include a sleeve, carabiner, or harness
- System is also customizable, call today to learn more


3M
DBI SALA


Fall Protection

Model No.	Mfg. No.	Length'	Price /Each
SEE810	LADSAF-20	20	629.00
SEE811	LADSAF-30	30	696.00

LAD-SAF™ X2 DETACHABLE CABLE SLEEVE

- Sleeve for Lad-Saf™ fixed ladder safety system
- For use on 3/8" (9.5 mm) and 5/16" (8 mm) 1 x 7 or 7 x 19 solid core cable
- Mobile design follows user for convenient climbing protection
- Easy to install and detach anywhere along lifeline
- Mechanical and inertial locking system stops falls within inches
- Built-in energy absorber and fall indicator with swivel
- Anti-inversion feature prevents incorrect installation
- Saflok™ steel carabiner for secure connection to harness
- Extremely rugged and corrosion resistant construction
- Extremely compact, lightweight design
- Order top and bottom brackets, cable and guides separately
- Sleeve for Lad-Saf™ fixed ladder safety system
- Attachment: Without Lanyard

Model No. SDK982
Mfg. No. 6160030
Price/Each \$558.00

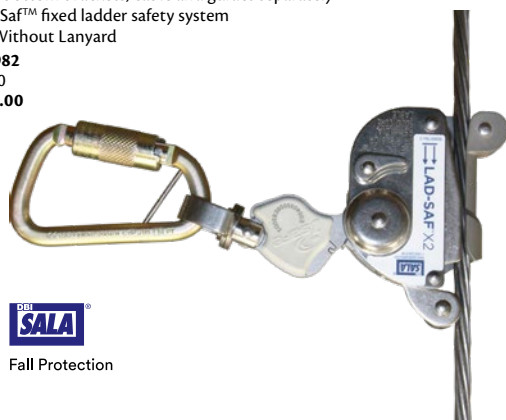
3M
DBI SALA

Fall Protection

ROLLGLISS™ R550 RESCUE & DESCENT DEVICE

- Emergency rescue and evacuation from a wide variety of elevated work areas
- Fully automatic controlled descent
- Bidirectional design enables multiple rescues
- Built-in rescue lifting wheel
- 100 ft. (30.5 m) 3/8" (9.5 mm) kernmantle rope lifeline
- Rated for up to 1 640 ft. (500 m) height for one user, 575 ft. (175 m) for two users
- Compact and lightweight design
- High strength corrosion resistant construction
- Integrated rope ears
- Dual brake design
- Equipped with i-Safe™
- Kit also contains 4 ft. (1.2 m) anchor sling, two carabiners and carrying bag
- No. of users: 2
- Lifeline material: Kernmantle
- Harness connection: Carabiner
- Anchorage connection type: Snap hook
- CSA Standard Z259.2.2

Model No. SDL610
Mfg. No. 3327100
Price/Each \$1389.00



PULLEY - ROLLGLISS™ R550

- Single
- 9-16 mm

Model No. SDL611
Mfg. No. 9504733
Price/Each \$121.64


3M
DBI SALA

Fall Protection

ROOF ANCHORS

- Fast and easy installation
- Installs to sloped or flat wood and metal decking roofs
- Non-penetrating design
- Swiveling self-retracting lifeline bracket
- Compact and lightweight design
- Secondary D-ring anchor point
- Adjustable legs, 360-degree swiveling
- Pair the DBI-SALA® roof anchors with the 3M™ DBI-SALA® Smart Lock SRLs


3M
DBI SALA

Fall Protection

Model No.	Mfg. No.	Description	Price /Each
SGJ694	2190073	3M™ DBI-SALA® Standing Seam Roof Anchor	868.00
SGJ695	2190071	3M™ DBI-SALA® Swiveling Roof Anchor	526.00
SGJ696	2190074	3M™ DBI-SALA® Construction Roof Anchor	2197.00
SGJ697	2190072	3M™ Protecta® Standing Seam Roof Anchor	505.00
SGJ698	2190070	3M™ Protecta® Swiveling Roof Anchor	364.00