

WIRE MESH PARTITION COMPONENTS (CONTINUED)

Everything necessary to create your own custom enclosure. Fast and easy assembly,
multiple sizes available. Please follow these guidelines for determining the components required.



CUSTOMIZE IT TO YOUR
SPECIFICATIONS.

4. SWING DOORS


HEAVY-DUTY

- Frame constructed with 1-1/4" x 1-1/4" square tube and 1" x 1" angle iron
- All are 7' in height and include a 1' transom for a total of 8' height
- May swing outwards to the left or to the right (except the heavy swing door with wicket which swings open to the left only)
- Fasteners are included

STANDARD-DUTY

- Frame constructed with 1-1/4" x 1-1/4" angle iron frame
- All are 7' in height and include a 1' transom for a total of 8' height
- May swing outwards to the left or to the right
- Fasteners are included

Blue Model No.	Price /Each	Yellow Model No.	Price /Each	Black Model No.	Price /Each	Description	Dimensions W' x H'	Wt. lbs.
KD110	489.00	KH933	509.00	RN628	489.00	Heavy-Duty Swing Door	3 x 7	65
KH853	449.00	KH934	469.00	RN626	439.00	Standard-Duty Swing Door	3 x 7	54
KD111	469.00	KH935	529.00	RN629	509.00	Heavy-Duty Swing Door	4 x 7	74
KH854	449.00	KH936	459.00	RN627	439.00	Standard-Duty Swing Door	4 x 7	62
KD112	1079.00	KH937	1239.00	RN630	1199.00	Heavy-Duty Swing Door w/Wicket	4 x 7	85

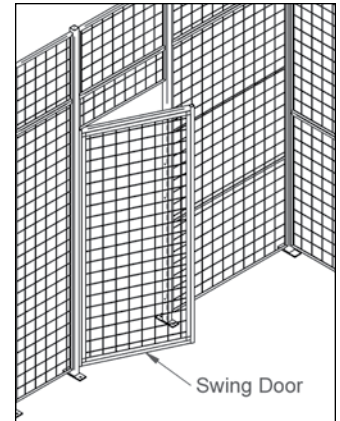

5. SLIDING DOORS


HEAVY-DUTY

- Frame constructed with 1-1/4" x 1-1/4" square tube and 1" x 1" angle iron
- All are 7' 7" in height and require one or more 8' lengths of 5" tall sliding door track, for a total of 8' height
- All sliding doors may slide open to the left or to the right
- To properly mount a sliding door, a post must be located on the side onto which the door slides, at the same distance away from the opening as the doors width

STANDARD-DUTY

- Frame constructed with 1-1/2" x 1-1/2" angle iron frame
- All are 7' 7" in height and require one or more 8' lengths of 5" tall sliding door track, for a total of 8' height
- All sliding doors may slide open to the left or to the right
- To properly mount a sliding door, a post must be located on the side onto which the door slides, at the same distance away from the opening as the doors width

Blue Model No.	Price /Each	Yellow Model No.	Price /Each	Black Model No.	Price /Each	Description	Dimensions W' x H'	Wt. lbs.
KH852	286.00	KH938	286.00	RN625	264.00	Standard-Duty Sliding Door	4 x 8	71
KD106	319.00	KH939	319.00	RN622	309.00	Heavy-Duty Sliding Door	4 x 8	85
KD108	629.00	KH940	719.00	RN624	699.00	Heavy-Duty Sliding Door	8 x 8	122
KD107	1089.00	KH941	1249.00	RN623	1209.00	Heavy-Duty Sliding Door	8 x 10	148

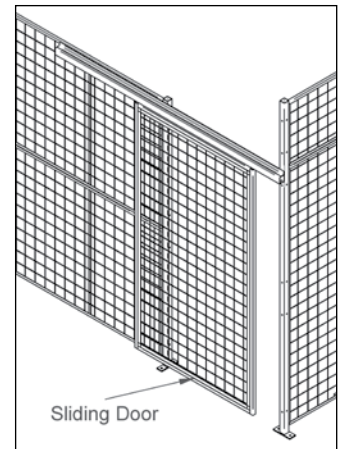

6. HARDWARE REQUIRED

For Each Stacked Panel Add:

- 4 x MMH254, 4 x MMM966 for each 8' stacked panel
- 2 x MMH254, 2 x MMM966 for each stacked panel under 8' long

For Each Post Add:

- 8 x MMH262, 8 x MMM966, 2 x KD001 for each 8' 3" post
- 12 x MMH262, 12 x MMM966, 2 x KD001 for each 10' 3" post
- 12 x MMH262, 12 x MMM966, 2 x KD001 for each 12' 3" post

Blue Model No.	Price /Each	Yellow Model No.	Price /Each	Black Model No.	Price /Each	Description	Wt. lbs.
KD029	192.00	KH942	199.00	RN656	199.00	8' Door Track	16
KD028	232.00	KH943	222.00	RN655	222.00	Sliding Door Hardware Kit	6
KD115	15.19	KH944	18.99	-	-	Wall Bracket Kit	0.1
MMH254*	0.11	-	-	-	-	5/16" x 1" Carriage Bolt	0.01
MMH262*	0.18	-	-	-	-	5/16" x 3" Carriage Bolt	0.01
MMM966	0.03	-	-	-	-	Nut 5/16" Hex	0.01
KD001	0.58	-	-	-	-	3/8" Floor Anchors	0.01

* 1 x MMM966 is required for each MMH254 and MMH262

For Each Sliding Door Add:

- 1 x Sliding Door Hardware Kit, 1 x 8' Door Track for each 4' wide sliding door (see chart for colours)
- 1 x Sliding Door Hardware Kit, 2 x 8' Door Track for each 8' wide sliding door (see chart for colours)